

Model RP8

Specifications and Technical Data

TYPICAL APPLICATIONS

Source Capture of:

- Welding Smoke and Fumes
- Grinding Dust
- Powders
- Other Dry Dusts

Features:

- Revolutionary Roto-Pulse Filter Cleaning Systems
- Large Capacity Dust Drawer or Hopper
- Built-In Plug Fans, 2000-5000 CFM
- Motor Starter/Overload Protection Standard
- After Pulse Cleaning Cycle Standard
- Heavy Duty Construction
- Full Range of Options

Options:

- Hopper Setup With Long Legs and Barrel Lid Kit.
- Low Profile Unit With Dust Drawers.
- Silencer.
- HEPA Afterfilter.
- Variety of Cartridge Filters.
- 5HP, 7 1/2HP or 10HP Motors.
- Magnahelic or Photohelic Gauges.
- Explosion Vents.
- Outdoor Package.




How It works

Roto-Pulse provides for a much better cleaning of the cartridges. The air is pulsed into a specially designed aluminum rotating

tube with pre-drilled holes. As the air enters this tube, the force of the pulse causes the tube to rotate. While spinning, air exits the pre-drilled holes. The result is that air hits all of the inside of the cartridge, pulsing dirt particles away from the

filter for a much more efficient cleaning cycle.

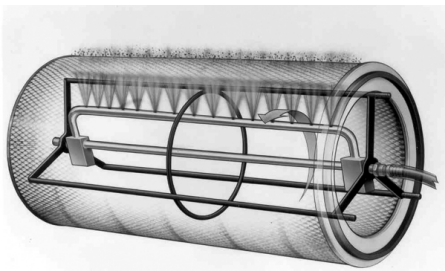

Specifications subject to change without notice.

Sold and Serviced by:

Specifications

OVERALL DIMENSIONS: 148.5" H X 42" W X 63" D-WITH LONG LEGS
84" H X 42" W X 63" D-WITHOUT LEGS

WEIGHT: 1850 LBS

CABINET: 12 GAUGE WELDED GALVANEALD STEEL WITH EXTERIOR SURFACES GROUND SMOOTH.

FINISH: INDUSTRIAL GRADE TEXTURED BAKED CRIMSON RED ENAMEL PAINT INSIDE AND OUT.

FILTRATION: EIGHT EACH, HIGH EFFICIENCY FIRE RETARDANT CARTRIDGES. EACH FILTER HAS 291 SQ. FT. OF MEDIA, 2328 SQ. FT. TOTAL. OTHER FILTERS AVAILABLE.

ROTO-PULSE CLEANING SYSTEM: UNIQUE ROTATING TUBE WITH PRE-DRILLED HOLES. AS AIR IS PULSED INTO THE TUBE, IT ROTATES AND AIR EXITS THE PRE-DRILLED HOLES. THIS COMBINATION PROVIDES A HIGHLY EFFICIENT AND TOTAL CLEANING OF THE CARTRIDGE.

FILTER ACCESS: EASY ACCESS THROUGH FILTER END CAPS.

MOTOR: SINGLE SPEED, 5HP, 3-PHASE, 208/230/460V, 60 HZ, TEFC MOTOR. OPTIONAL 7 1/2 AND 10HP AVAILABLE FOR HIGH STATIC APPLICATIONS.

BLOWER: DIRECT DRIVE, HIGH STATIC, BACKWARD INCLINED PLUG FAN.

AIR VOLUME: 2000-5000 CFM - CONSULT BLOWER CURVES FOR SPECIFIC CONFIGURATIONS

FILTER CHANGE INDICATOR: MAGNAHELIC OR PHOTOHELIC GAUGE OPTIONAL.

WIND LOAD RATING: 100 MPH.

CABINET PRESSURE RATING: +/- 20 INCHES W.C.

CONTROLS: SOLID STATE TIMER BOARD, FACTORY WIRED AND INSTALLED.

INLETS: OPTIONAL INLET PLENUM WITH THREE EACH 14" X 14" OPENINGS.

AIR CONSUMPTION: FACTORY SET AT 2.7 SCFM. 3/4" LINE REQUIRED.

AFTER PULSE SYSTEM: STANDARD EQUIPMENT DESIGNED TO CLEAN FILTERS AFTER UNIT IS TURNED OFF. TIMER CAN BE ADJUSTED BETWEEN 0 AND 15 MINUTES.

HOPPER: 14 GAUGE WELDED STEEL WITH 10" DIAMETER OUTLET.

L2225-02/05